




1. I removed the rear cargo are light.

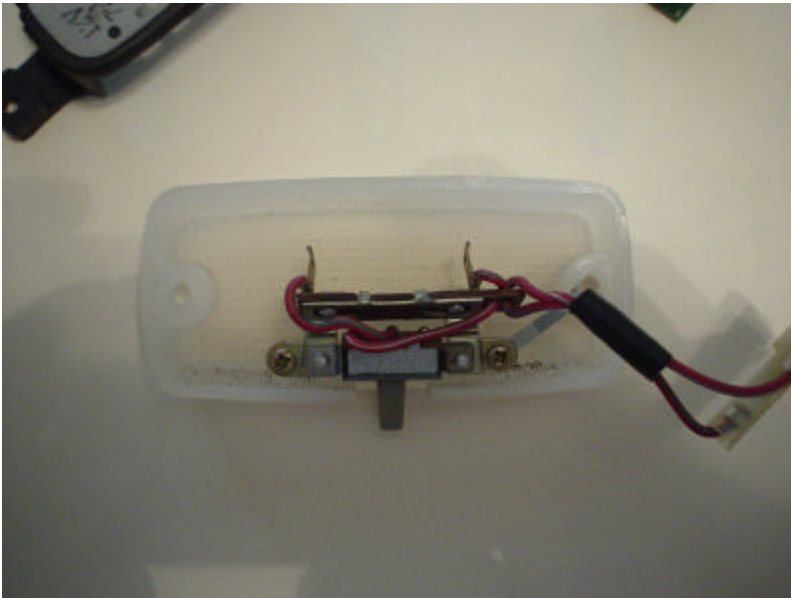


2. Removed heat shield and bent the bracket that the bulb was mounted in, down towards the lenses cover.

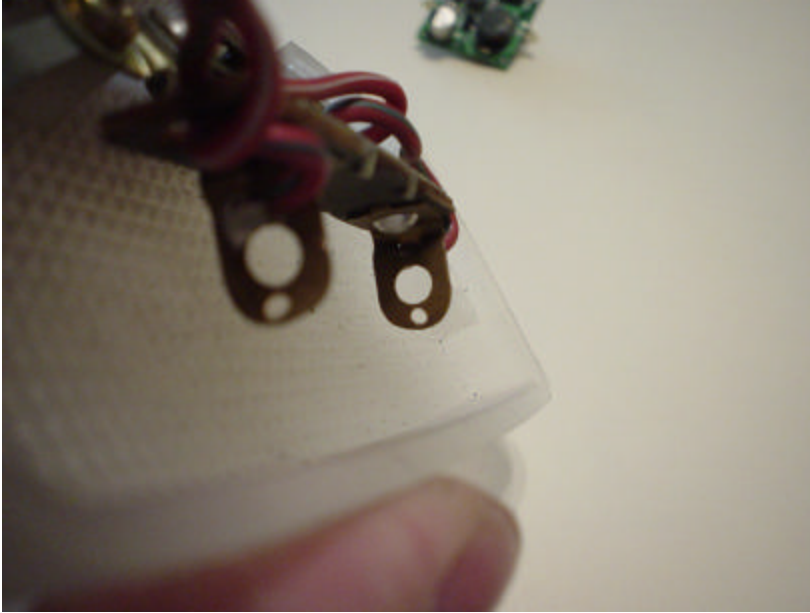


3. Drilled a very small hole in each of the bulb holding tabs.

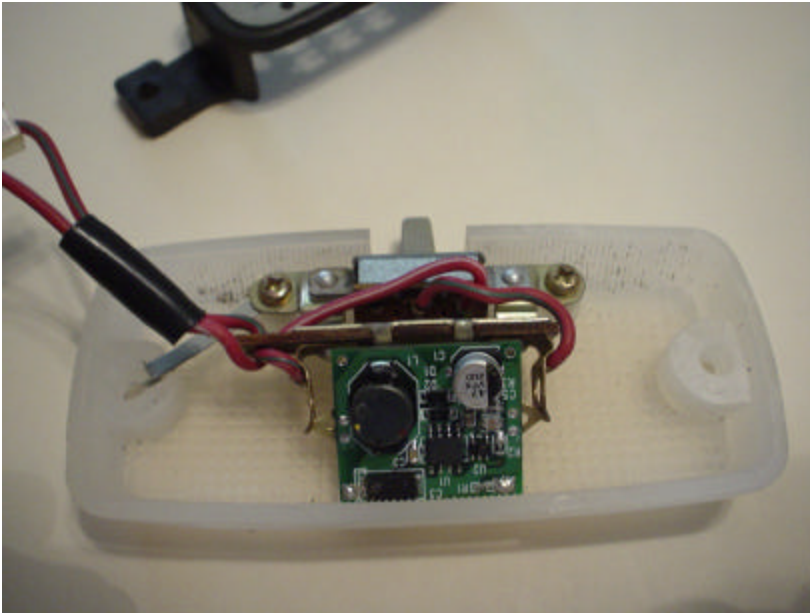

4. Mounted the LED board the reassembled

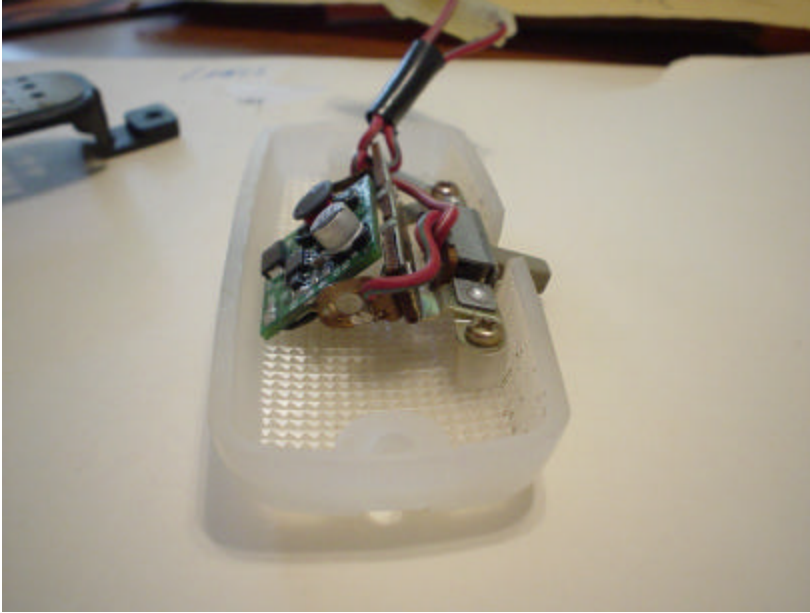

This picture shows the angles better.

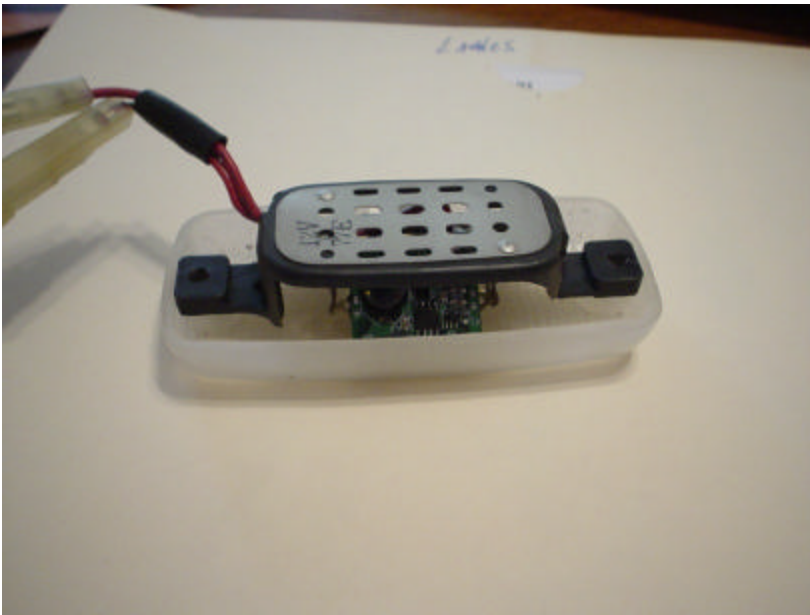

Heat shield installed.



Beautiful!